



SECURICO CCTV

Securico CCTV System

Mobile Devices: Home & Away Configuration - User Manual

Version 1.1

February 2019

Mobile Devices: Home & Away Configuration

User Manual

COPYRIGHT © 2019 Securico CCTV

ALL RIGHTS RESERVED.

About this Manual

This manual is applicable to Securico CCTV Systems using Hikvision hardware and software.

The manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons.

Please use this user manual under the guidance of professionals.

Trademarks Acknowledgement and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

Legal Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED "AS IS", WITH ALL FAULTS AND ERRORS, AND SECURICO CCTV MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL SECURICO, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF SECURICO HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. SECURICO SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, SECURICO WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.

SURVEILLANCE LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. SECURICO SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THIS MANUAL AND THE APPLICABLE LAW, THE LATER PREVAILS.

Mobile Devices: Home & Away Configuration

Chapter 1. Download the App

Search your phone or tablet's app store for **Hik-Connect**.

The app is available for Android and iPhone / iPad.


Install the app to your device.

Chapter 2. App Setup

Open the app **Hik-Connect** on your mobile device.

On android you may be asked to allow Hik-Connect to access photos, media and files on your device. Tap **Allow** so that the app works properly.

Next, select United Kingdom from the regional settings menu.


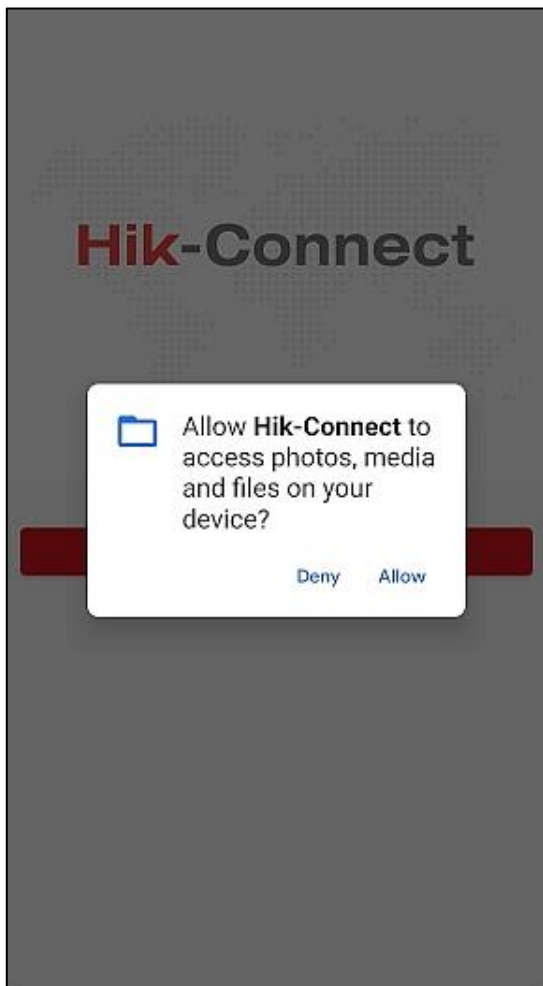


Mobile Devices: Home & Away Configuration

If you already have an account for the Hik-Connect app, tap **login** and enter your credentials.

If you do not have an account, tap **login**, then **register**. Follow the on-screen instructions to register your Hik-Connect account.

Once logged into the app tap the **+** symbol top-right of the screen. Then tap **Manual Adding**.

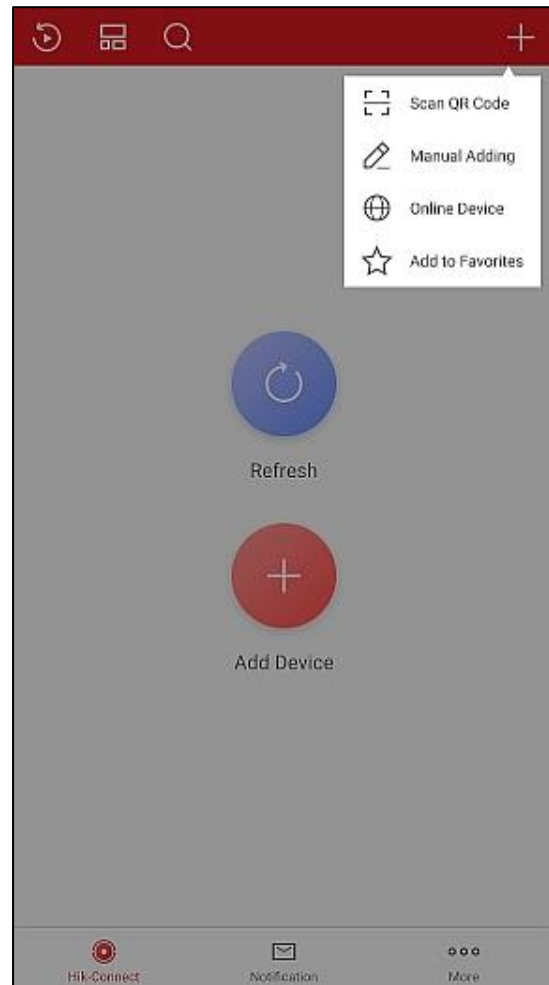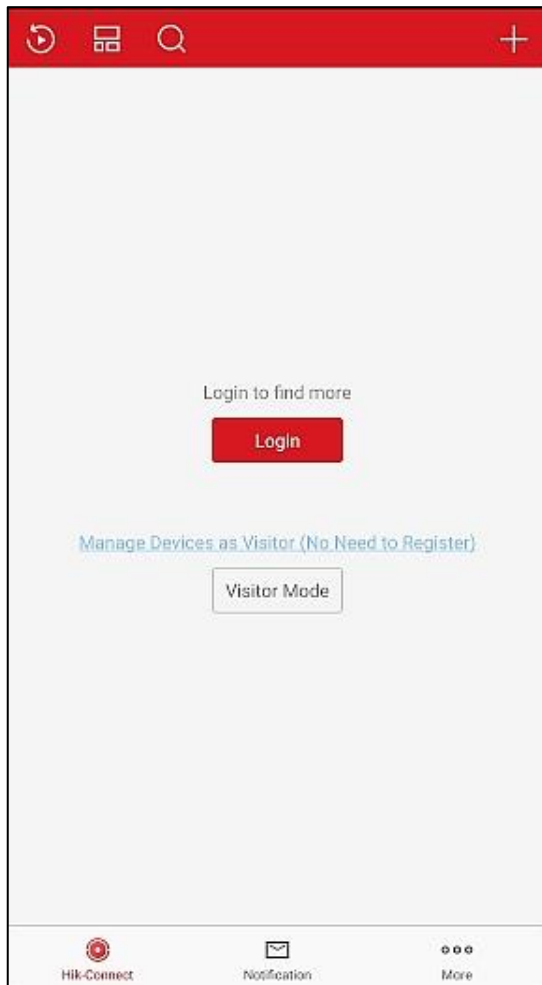

Mobile Devices: Home & Away Configuration

Chapter 3. Add the Home Settings

First we will setup the option for when you are at home (or the location where the CCTV is installed).

For Adding Type, choose **IP/Domain**

In the Alias field, type **Home**


Address: we will cover this part in a moment. For now, continue with the other fields.

For Port, enter **8000**

User Name is: **admin**


Password: If you do not know your system password, please contact support@securicocctv.co.uk with your name, address and postcode, for security.

Address: In the address field, we will enter the local IP of your DVR / NVR. This local IP is dependent upon what internet service provider (ISP) you have. Please see the table below for what you should enter in the address field.

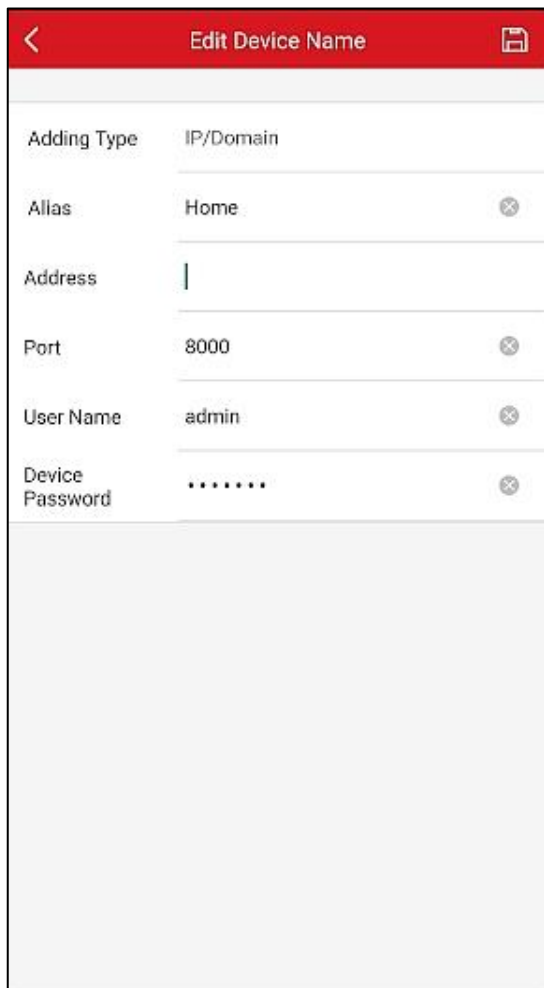

ISP	DVR/NVR local IP
BT:	192.168.1.101
Sky:	192.168.0.101
EE:	192.168.1.101
Virgin:	192.168.0.101
TalkTalk:	192.168.1.101
PlusNet:	192.168.1.101

Mobile Devices: Home & Away Configuration

With all the fields now completed, tap the icon  top right to save the settings.

Remember that this Home setting will only work when connected to your home WiFi network (or the location where your CCTV is installed).

Chapter 4. Add the Away Settings

This part is almost exactly the same as adding the Home setting, except for the **Address** and the **Alias**

Tap the **+** symbol and then **Manual Adding**.

Adding Type: **IP/Domain**

Alias: **Away**

Address: this part is unique to you. If you are with Virgin Media Broadband/Fibre see the part below to find your public IP V4 address. If you are *not* with Virgin please refer to the email we sent with this user manual, and in the address field enter your 'dynamic DNS host name'.

Port: **8000**

User Name: **admin**

Password: If you do not know your system password, please contact support@securicocctv.co.uk with your name, address and postcode, for security.


Customers using Virgin Media Broadband/Fibre

Virgin Media give their customers a static public IPv4 address.

To find your public IP, whilst connected to the WiFi where your CCTV is installed, visit www.whatsmyip.org

Make a note of the IPv4 address given on-screen.

Enter your IPv4 address in the Address field in the Hik-Connect app.

With all the fields now completed, tap the icon  top right to save the settings.

You will now have a Home option and an Away option on the Devices screen. Tap the Home or Away option to view your CCTV.