



SECURICO CCTV

Securico CCTV System

IVMS-4200 Setup Guide - User Manual

Version 1.0

March 2019

IVMS-4200 Setup Guide

User Manual

COPYRIGHT © 2019 Securico CCTV

ALL RIGHTS RESERVED.

About this Manual

This manual is applicable to Securico CCTV Systems using Hikvision hardware and software.

The manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons.

Please use this user manual under the guidance of professionals.

Trademarks Acknowledgement and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

Legal Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED "AS IS", WITH ALL FAULTS AND ERRORS, AND SECURICO CCTV MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL SECURICO, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF SECURICO HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. SECURICO SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, SECURICO WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.

SURVEILLANCE LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. SECURICO SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THIS MANUAL AND THE APPLICABLE LAW, THE LATER PREVAILS.

IVMS-4200 Setup Guide


Chapter 1 – Software to Download

The software to download and install is called **Hikvision IVMS-4200**.

Follow this link and download for Windows or Mac, whichever is applicable to you.

<https://www.hikvision.com/en/Support/Downloads/Client-Software>

The screenshot below shows version v2.8.2.2 (Windows) which is the latest version at the time of writing. Please however download the latest version which will state **Hikvision iVMS-4200 v... (NEW!)**

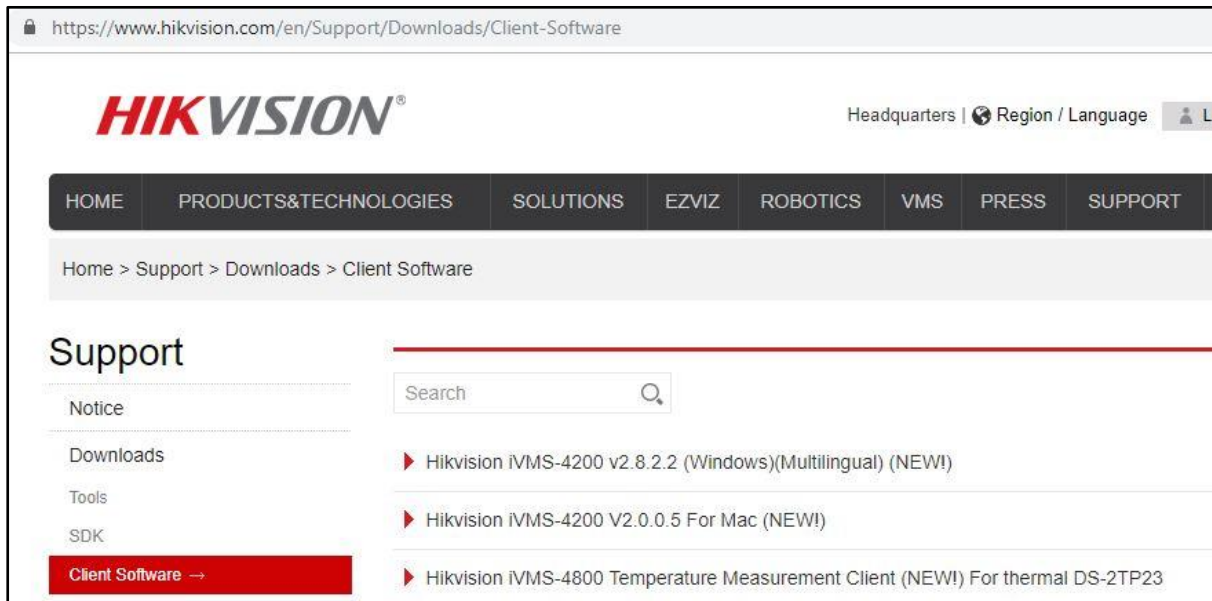

IVMS-4200 Setup Guide

Chapter 2 – Start the Installation


Once downloaded, please extract the file from the .RAR container and then run the setup programme.

Should you require a .RAR extractor there are many available such as 7-Zip which is free: <https://www.7-zip.org/download.html>

During the installation of IVMS-4200 please leave all the default options set and continue to click **next** to complete the install.



Run the programme IMVS-4200 once it has installed and allow it to start up. It may take a minute to initialise.

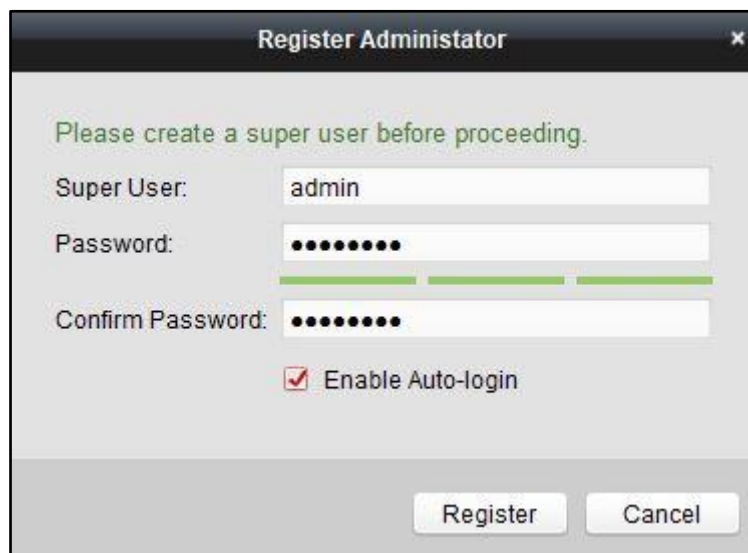


When the start up screen has disappeared, you will be faced with a **Register Administrator** screen.

Add a **username** and a **password**. Select **Enable Auto-Login** if you do not wish to enter this login each time the programme starts. Click **Register**


IVMS-4200 Setup Guide

Chapter 3 – Add Your Hik-Connect Account

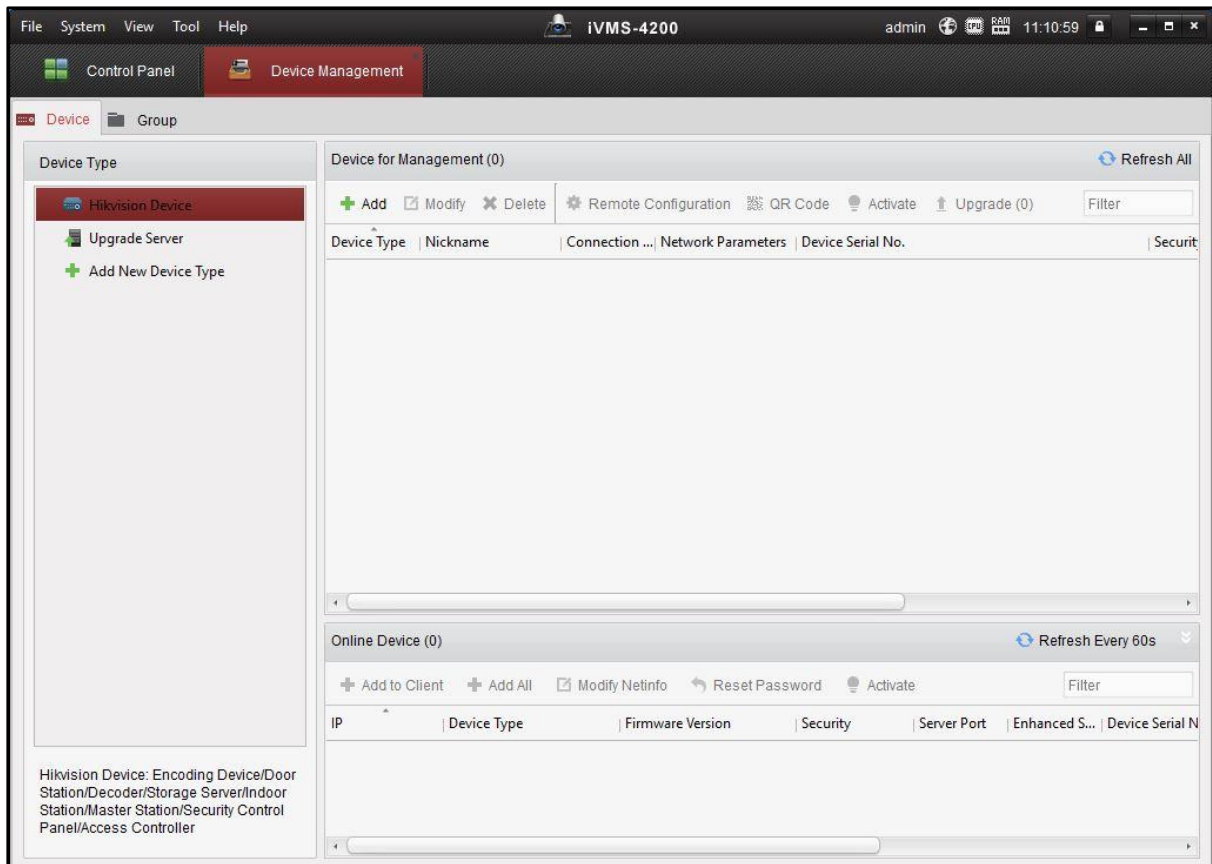


The first screen you will see when IVMS-4200 has fully loaded is **Device Management**.

Click **Add New Device Type** in the left pane.

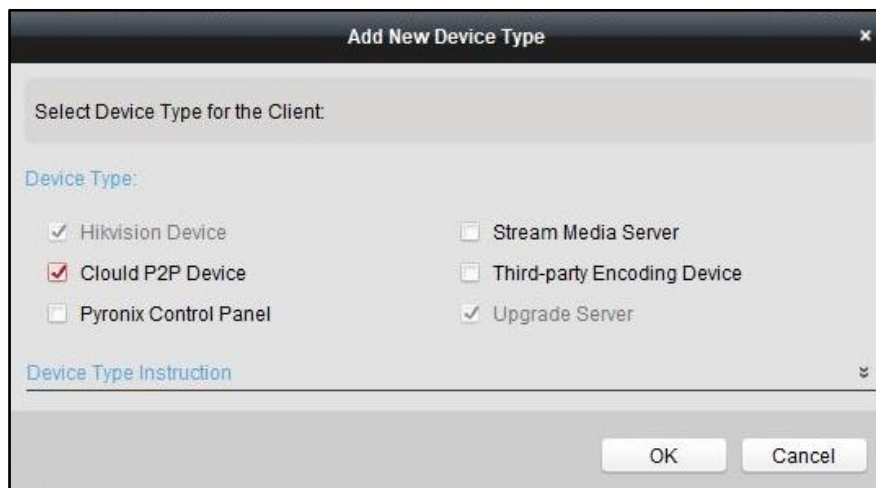

Tick the box for **Hik-Connect Device** (not to be confused with 'Hikvision Device') or if you do not see Hik-Connect Device, select **Cloud P2P Device**.

IVMS-4200 Setup Guide

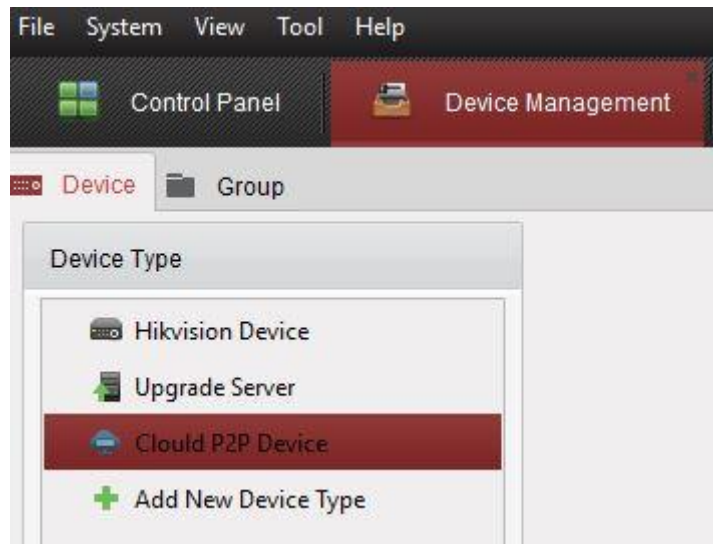

Hik-Connect Device (or **Cloud P2P Device**) is now listed in the left pane, please click it.



Choose **United Kingdom** from the region select menu and click **Login**

IVMS-4200 Setup Guide

Login

User Name/Phone Number

Password

Login

Register

Allow to do the following:

- Get your personal information.
- Get your device information.

When originally setup by the Securico engineer, the Hik-Connect app on your phone would normally have been registered with your mobile phone number.

Enter your phone number prefixing it with 44. e.g. 4407xxxxxxxx (include the 0)


Alternatively you can find your user name in the Hik-Connect mobile app under More > Account Management.

Enter your Hik-Connect password (not to be confused with the system password).

If you cannot remember your password it can be changed in the Hik-Connect mobile app, again under More > Account Management.


Click **Login**

Chapter 4 – Add the Stream Key

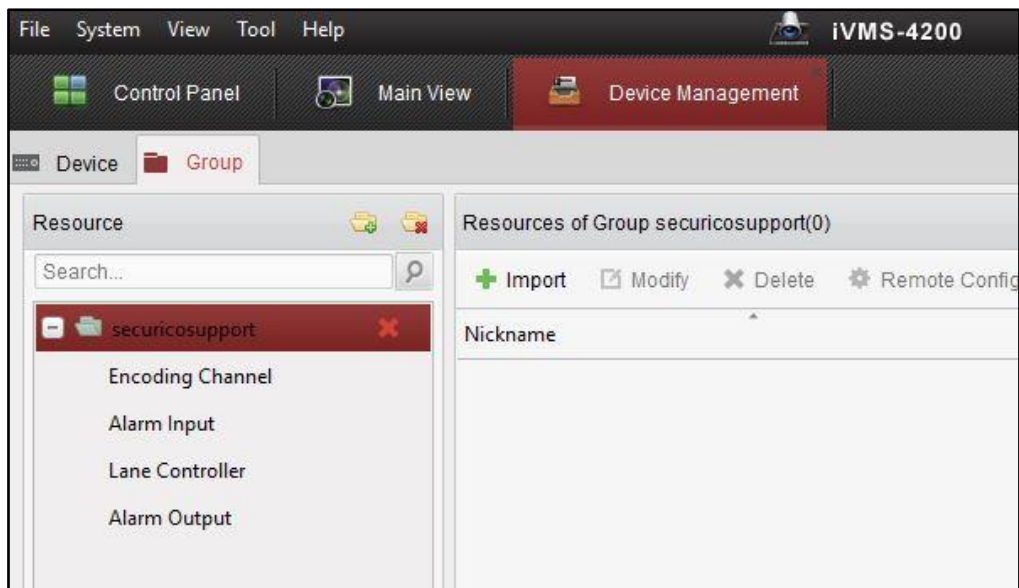

Now logged into IVMS-4200 with your Hik-Connect credentials, click on **Group**.

Click one of the cameras and then click **Modify**.

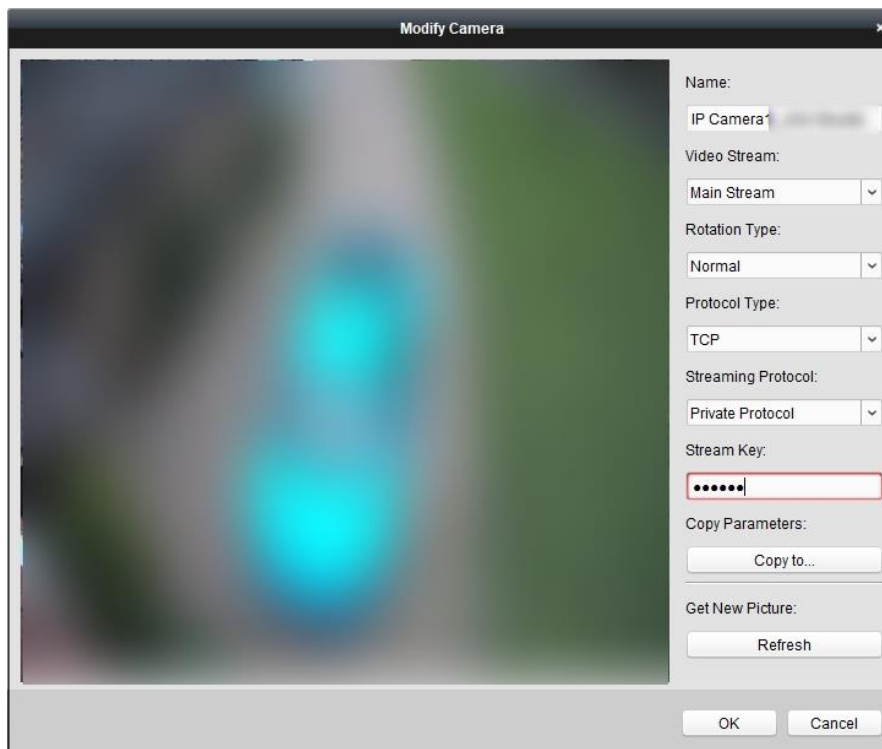


The **Modify Camera** window will open.


Click in the **Stream Key** box and type **123456**

Click **Copy to** and choose the remaining cameras. Click **OK** to return to the main window.

Chapter 5 – Live View

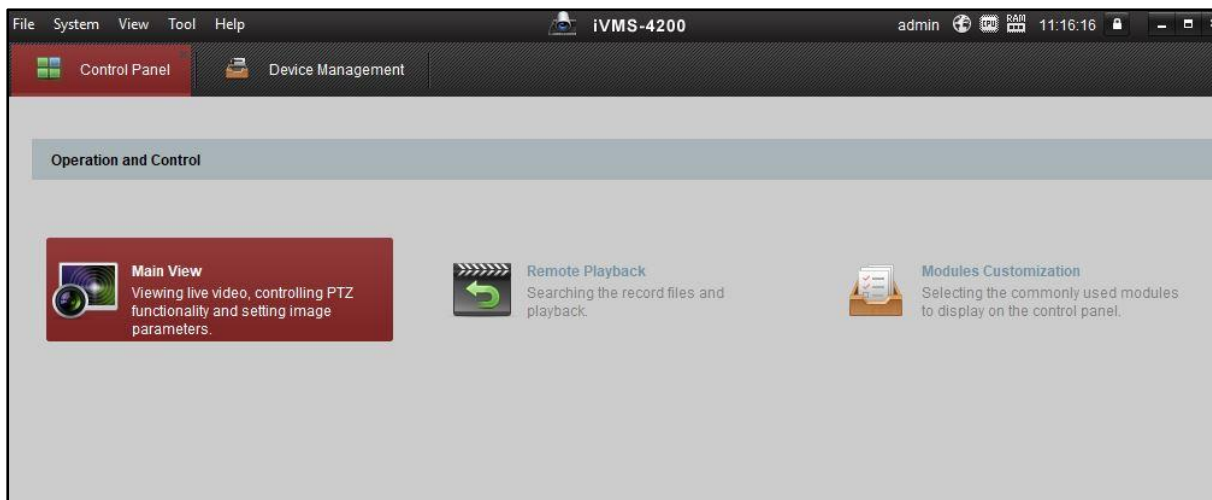


Click on **Control Panel**, then **Main View**.

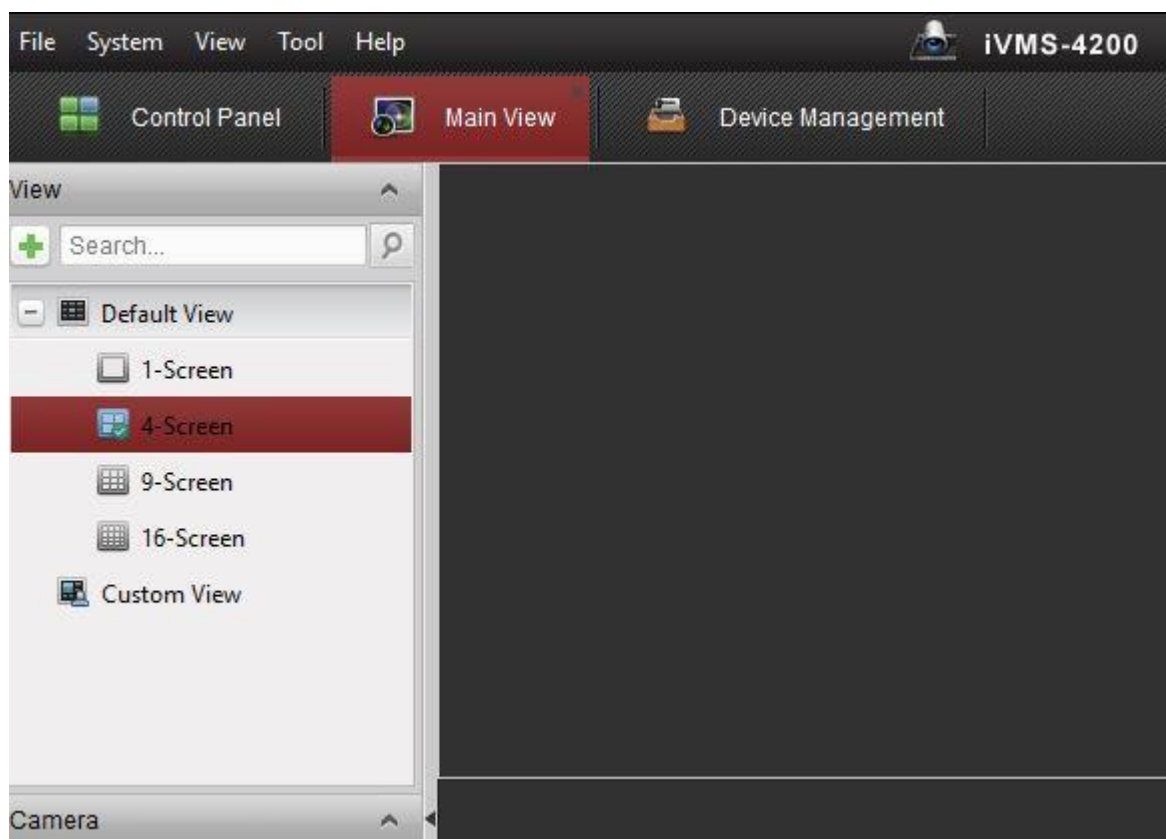

From **Main View** click **4-Screen**.

IVMS-4200 Setup Guide

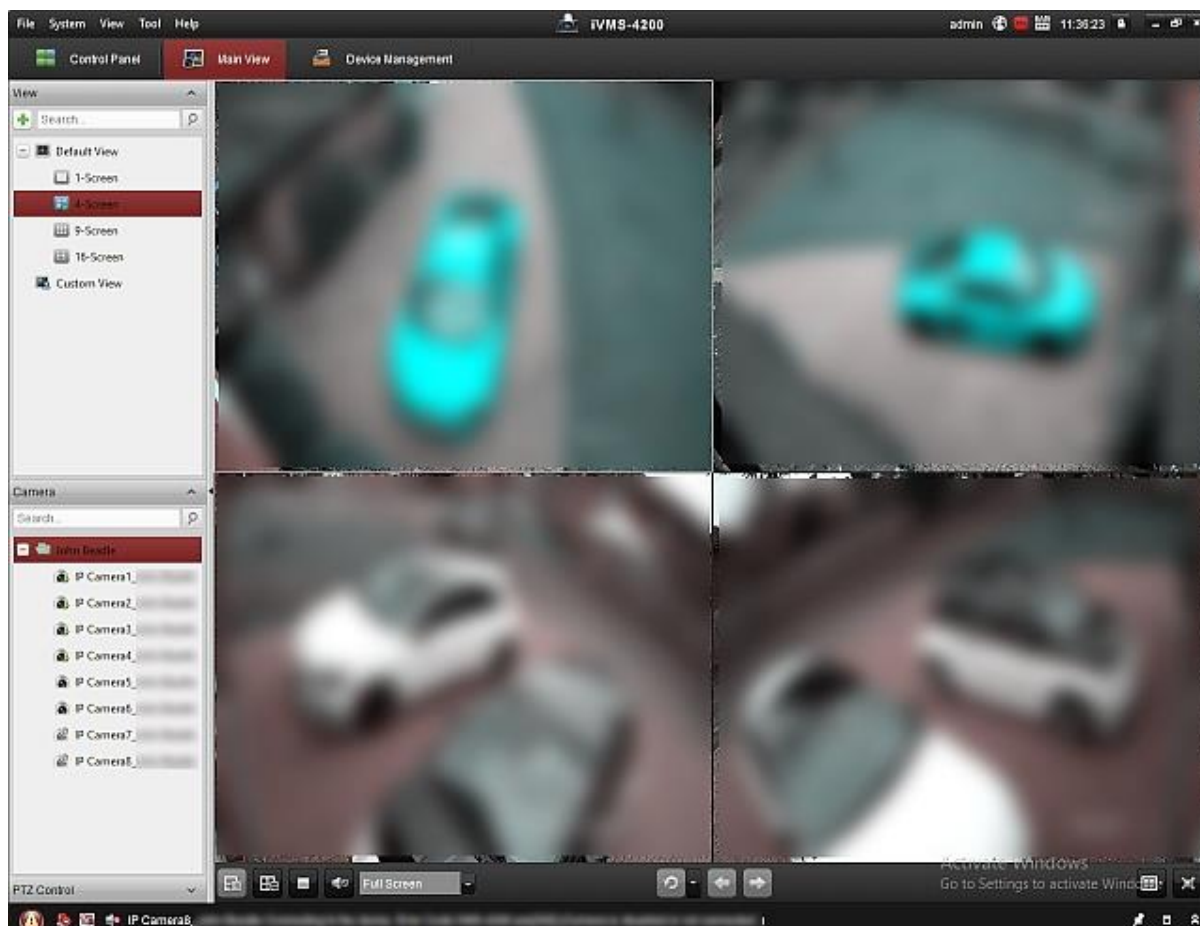

You have completed the installation and setup of IVMS-4200, added your Hik-Connect account and can view your cameras.